FACILITY & LANDLORD ENGINEERING SUBMITTAL

S1

Pre-Fabricated Enterprise IT Equipment Shelter

Physical Pad Footprint, Electrical Tie-In & Property Operations Specification

DOC ID: S1-PAD-40-REV2
ZONE: ~1,500 SF (30' × 50')
MOUNT: SKID MAT / NO SLAB

PAD FOOTPRINT	SITE CIVIL WORK	ACOUSTIC & WATER	POWER & INSURANCE
~1,500 SF	**0 Excavation**	**< 65 dBA @ 25'**	**100% Metered**
30' × 50' fenced (12–15 stalls)	Precast mats · 48-hr removable	Closed-loop · 0 water · 0 fuel	$0 owner cost · $2M CGL policy

FIG 1 · TYPICAL INSTALLED EXTERIOR — 40-FT UL SHELTER


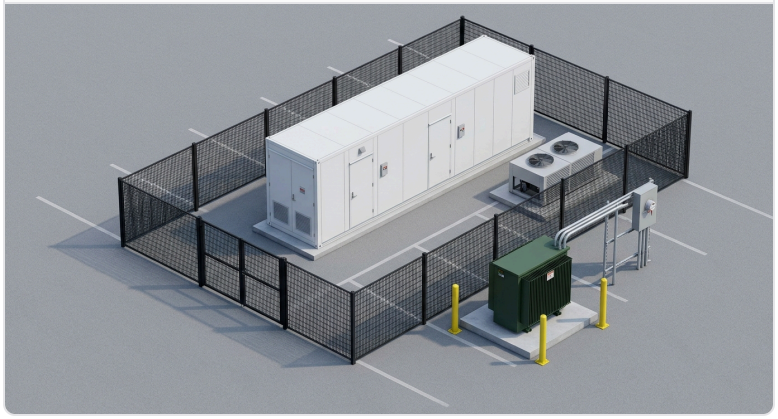


FIG 2 · TYPICAL PAD PLAN (30' × 50') — PLAN VIEW (NTS)

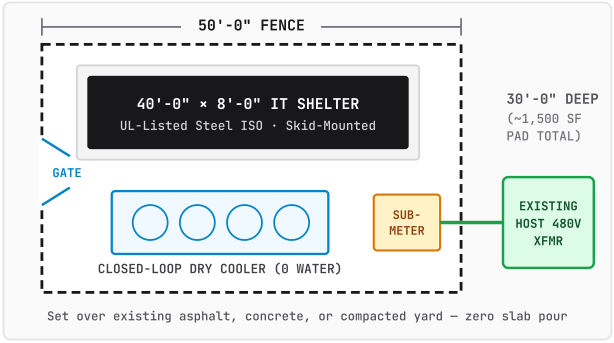

FACILITY, ELECTRICAL & PROPERTY MANAGEMENT SPECIFICATIONS

STANDARD TELECOM / EDGE IT PAD LICENSE

01 **Permitted Use & Code**	**Enterprise IT & commercial edge servers only (strictly zero cryptocurrency mining).** Factory-integrated, UL-listed steel equipment shelter. All site electrical work completed by licensed, insured Texas Master Electricians per NEC and local code.
02 **Dimensions & Placement**	Standard **40' L × 8' W × 9'6" H** ISO steel enclosure + closed-loop cooler inside a fenced **~30' × 50' (~1,500 SF)** rear yard or parking zone (**12–15** spaces). Rests on precast load-spreading mats—**no excavation, no slab pour, crane-removable within 48 hours**.
03 **Sound, Water & Hazmat**	Sound-attenuated to **< 65 dBA at 25 ft** (comparable to a standard commercial rooftop HVAC unit). Closed-loop dry heat rejection requires **zero water/sewer tie-in, zero discharge, zero on-site diesel fuel tanks, and zero hazardous materials**.
04 **Power & Metering**	Ties into spare **480V 3-Phase** capacity (**1,500+ kVA** target) via lockable disconnect and ANSI C12.20 revenue-grade sub-meter (or utility sub-account). **Licensee pays 100% of metered electricity and demand charges—$0 utility cost to Owner.**
05 **Traffic & Security**	**Unmanned "lights-out" 24/7 remote monitoring.** Routine maintenance averages **1–2** scheduled technician visits per month during business hours—zero daily staff, zero dock congestion, and locked architectural perimeter screening.
06 **License & Insurance**	Documented as a Commercial Equipment Pad License (personal property, zero title encumbrance). Licensee carries **$2,000,000** Commercial General Liability + full equipment coverage naming **Property Owner & Manager as Additional Insured**.

LANDLORD TURNKEY PROCESS: (1) 15-min walk of spare 480V switchgear/transformer → (2) Simple Pad License ($0 rent until energized; full utility pass-through) → (3) Licensed electrician sub-meter tie-in & 48-hr crane placement.

BEN JONES · (830) 307-0890 · BEN@JOCKEYVC.COM